

COFFEE BREWING SYSTEMS

CBS-2230 NG Brewers 3.0-4.0 LITER BREWING SYSTEM

Shown with D041 3.0L Airpot & D451 4.0L / 1G LUXUS® Thermal Server




CAPACITIVE TOUCHSCREEN DISPLAY

The NG line features a capacitive LED touchscreen display. Set brew times, program recipe buttons and more with just the touch of a finger. It's as easy as a smartphone.



LED STATUS BAR

Quickly identify where your machine is at in the brewing process from anywhere in the room. The LED Status Bar changes color during the brewing process to let you know when it's ready to brew, brewing, almost done and ready to serve.



BREW BASKET LOCKS

Brew baskets lock in place during the brewing process for added safety and quality control.




FEATURES

CBS-2230 NG Brewers



BREW BASKET DESIGN

Advanced brew basket design provides a deeper bed depth and superior thermal insulation for better extraction.



CASCADING SPRAY DOME



Patented design provides even saturation of the coffee bed for maximum extraction. Lime resistant design makes for less service calls.



ECO MODE

Reduces tank temperature during periods of non-operation to cut down on electricity usage.

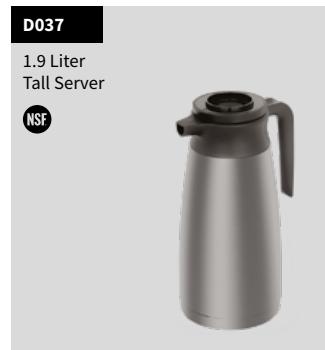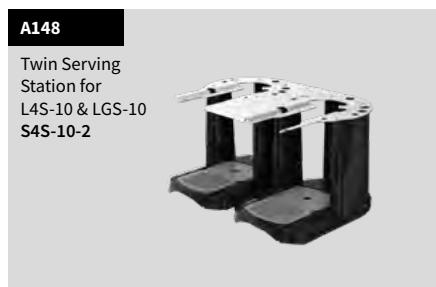

DISPENSERS**CBS-2230 NG Brewers****DISPENSERS****SERVING STATION FOR THERMAL SERVERS**

All dispensers and serving stations **SOLD SEPARATELY**.



ACCESSORIES

CBS-2230 NG Brewers

NOTE

Coffee brewers are available with **Plastic** or **Metal** brew basket options. Material type is of personal preference and does not affect flavor profile, however if you are looking for color identification the plastic brew baskets are the best option.

BREW BASKETS AND PAPER FILTERS

Item Number	Brew Basket	Coffee Capacity	Filter Size	Filter SKU	Filter/Case
All configurations	Stainless Steel	Up to 8oz / 227g	13" x 5"	F002	500/cs



LEGS SETUP OPTIONS

Comes standard with
1" and 2.5" legs



WATER FILTRATION SYSTEM

Filtration System	Item Number	Item Description	Rated Capacity	Working Pressure	Weight
BWT BestProtect	XL	In-Line System	3,002 liters	29-116 psi [2-8 bar], non-shock	11.0 lbs / 5.0 kg
BWT BestProtect	XL	Replacement Cartridge	3,002 liters	29-116 psi [2-8 bar], non-shock	11.0 lbs / 5.0 kg
BWT BestProtect	XXL	In-Line System	4,562 liters	29-116 psi [2-8 bar], non-shock	11.0 lbs / 5.0 kg
BWT BestProtect	XXL	Replacement Cartridge	4,562 liters	29-116 psi [2-8 bar], non-shock	11.0 lbs / 5.0 kg

BWT BEST PROTECT

In-Line Water
Filtration System



SET INCLUDES: 1ea. filter cartridge / 1ea. universal filter head / 1ea. wall mounting bracket Braided hose supplies 3/8" and 3/4" compression, in 24" or 48" lengths

- Recommended for small- to large-sized operations
- Carbonate hardness removal prevents scale deposits and retains minerals
- Granular-activated carbon reduces sediment and chlorine
- Quick-disconnect style head/cartridge design cartridge for effortless replacement
- Durable, corrosion-resistant head includes built-in shutoff valve
- Four bypass settings allows for different water qualities and product preferences

TECHNICAL SPECIFICATIONS

NORTH AMERICA

CBS-2231 NG Brewer

ELECTRICAL

Item Number	Brew Basket	Voltage	Heater Config.	Phase	Wires	kW	Connection	Max Amp Draw	[Gal] / [L] Hour	Certification
E2231US-1X117-MA011 DUAL VOLTAGE	13x5" Metal	120 120/208-240	1 x 1.7 kW 2 x 1.7 kW	1 1	2+G 3+G	1.7 3.4	NEMA 5-15P No Cord	14.7 12.8-14.7	4.5 / 17.1 7.9 / 30.0	 

WATER

Water Inlet	Water Pressure [psig] / [Bar]	Minimum Flow Rate [gpm] / [L/min]	Tank Capacity [Gal] / [L]
3/8" Compression Fitting	20-75 / 1.37-5.17	1.50 / 5.68	3.00 / 11.36

CBS-2232 NG Brewer

ELECTRICAL

Item Number	Brew Basket	Voltage	Heater Config.	Phase	Wires	kW	Connection	Max Amp Draw	[Gal] / [L] Hour	Certification
E2232US-1B230-MA010	13x5" Metal	208-240	2 x 3.0 kW	1	2+G	3.5-4.6	No Cord	22.2-25.5	12.2 / 46.3	 

WATER

Water Inlet	Water Pressure [psig] / [Bar]	Minimum Flow Rate [gpm] / [L/min]	Tank Capacity [Gal] / [L]
3/8" Compression Fitting	20-75 / 1.37-5.17	1.50 / 5.68	5.48 / 10.07

DIMENSIONS**CBS-2231 NG Brewer****DIMENSIONS**

	Height (A)	Width (B)	Depth (D)	Depth (E)	Faucet Clearance (F)	Brew Basket Clearance (G)
Product Dimensions with 1" Standard Legs	26.25" 66.67 cm	11.75" 29.84 cm	20.5" 52.07 cm	15.13" 38.43 cm	10.63" 26.98 cm	13.13" 33.35 cm
Product Dimensions with 2.5" Optional Legs	27.75" 70.48 cm	11.75" 29.84 cm	20.5" 52.07 cm	15.13" 38.43 cm	12.13" 30.80 cm	14.63" 37.16 cm
Shipping Dimensions	30.0" 76.20 cm	17.0" 43.18 cm	22.0" 55.88 cm	N/A	N/A	N/A

WEIGHT

	Empty [lbs] / [kg]	Filled [lbs] / [kg]
Product Weight	29 lbs 13.1 kg	55 lbs 24.9 kg
Shipping Weight	41 lbs 18.6 kg	N/A

CBS-2232 NG Brewer**DIMENSIONS**

	Height (A)	Width (C)	Depth (D)	Depth (E)	Faucet Clearance (F)	Brew Basket Clearance (G)
Product Dimensions with 1" Standard Legs	26.25" 66.67 cm	19.75" 50.16 cm	20.5" 52.07 cm	15.13" 38.43 cm	10.63" 26.98 cm	13.13" 33.35 cm
Product Dimensions with 2.5" Optional Legs	27.75" 70.48 cm	19.75" 50.16 cm	20.5" 52.07 cm	15.13" 38.43 cm	12.13" 30.80 cm	14.63" 37.16 cm
Shipping Dimensions	30.0" 76.20 cm	23.0" 58.42 cm	25.0" 63.50 cm	N/A	N/A	N/A

WEIGHT

	Empty [lbs] / [kg]	Filled [lbs] / [kg]
Product Weight	47 lbs 21.3 kg	92 lbs 41.7 kg
Shipping Weight	55 lbs 24.9 kg	N/A

Shown with 1" standard legs.

NO. 1335 DAVENPORT ROAD
TORONTO, ONTARIO M6H 2H4

416-537-3439

hello@zuccarini.ca
ZUCCARINI.CA