


SPECS + PRE-INSTALLATION REQUIREMENTS FOR THE ELEKTRA VERVE

2022-FEB



ELECTRICAL REQUIREMENTS

- 110 VOLT/15 AMP (actual 1800W/17A)
- Standard **NEMA 5-15** receptacle ①
- Receptacle should be installed within 3 ft (90cm) of machine + grinder(s), but can be above or below the counter.




COUNTER SPACE REQUIREMENTS

Width: 14.75" (38cm) Depth: 17.5" (45cm)
Height: 16.5" (42.5cm) Weight: 60lb (27 kg)

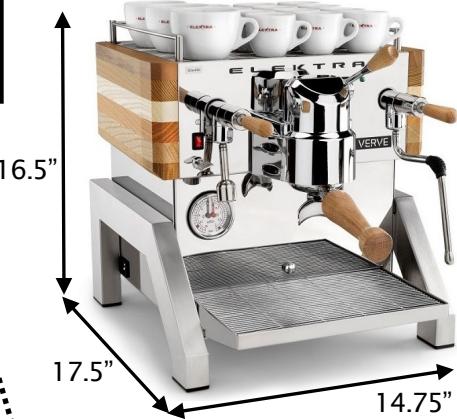

WATER REQUIREMENTS

- WATER SOFTENING IS RECOMMENDED** for installed machines, to maintain a "hardness" level of **3-4 GPG (50-75 PPM)***.
- Your plumber should install a **1/2"** dedicated **COLD** water line with **shut-off valve** and a **3/8"** compression fitting ② within 3 feet (90cm) of the machine, **and a pressure reducer to a maximum of 3-4 bars (available @ Zuccarini)**.
- SHUT-OFF ② MUST ALWAYS BE EASILY ACCESSIBLE IN CASE OF AN EMERGENCY!**
- If you choose our **BWT** in-line water softening system, the **shut-off valve** is normally installed **below your counter** ③ leaving space for (and access to) the filter assembly.
- *If using an in-home **REVERSE OSMOSIS (RO)** or similar system, **YOU MUST MAINTAIN 3 to 4 BARS OF PRESSURE** to the machine. Also, you may choose to install the water-line **above OR below the counter**. NB The machine

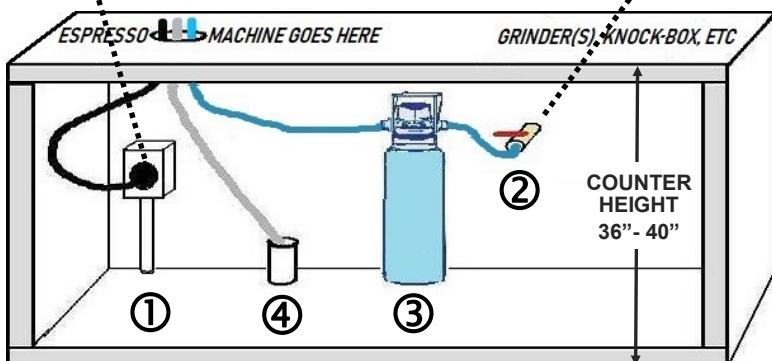

comes with a 3 ft (90cm) flexible hose fitted with a **3/8" European fitting**, but we can provide a longer hose AND/OR a fitting to match it to your **North American 3/8" compression fitting** (extra charges may apply).

DRAINAGE (not necessarily recommended - ask for details)

- A minimum 1" (2.5cm) diameter **under-counter drain** within 3 ft (90cm) of the machine ④.
- NOTE:** Drain hose (included) must always run **DOWNWARDS** (never bending upwards).

COUNTER REQUIREMENTS (if you're installing a BWT and/or DRAINAGE)

- Minimum 2.5" (7cm) hole in the counter under the machine for cold water, drain hose (& power supply):
 - the hole should be near the center of the spot where the machine will sit, near the back**
 - IF ZUCCARINI IS INSTALLING YOUR MACHINE and your COUNTER-TOP IS MADE OF STONE, METAL, or >2" THICK WOOD, THE HOLE MUST BE DRILLED BEFORE OUR INSTALLER ARRIVES**
- Leave **vertical OR horizontal** space under the counter beside the cold water shut-off ② for the **BWT Water Softener** ④ (approx. 20"x5"x5" / 51x13x13cm) which must remain accessible for annual replacement.
- Suggested **counter height is 36" to 40"** (1 metre); suggested **vertical space above counter is min. 19"**.

ELEKTRA  **MADE IN ITALY**

FAILURE TO HAVE SITE PREPARED AT TIME OF INSTALLATION APPOINTMENT
WILL CAUSE DELAYS & RESULT IN ADDITIONAL SERVICE & TRAVEL CHARGES.

Zuccarini
1335 DAVENPORT RD, TORONTO
416-537-3439
ZUCCARINI.CA