


IZZO ALEX PID

ELECTRICAL REQUIREMENTS

- 110 VOLT/15 AMP (actual 1350W/12A)
- Standard NEMA 5-15 receptacle ①
- Receptacle should be installed within 3 ft (90cm) of machine + grinder(s), but can be above or below the counter.



WATER REQUIREMENTS

- WATER SOFTENING IS RECOMMENDED for installed machines, to maintain a "hardness" level of 3-4 GPG (50-75 PPM)*.

- Your plumber should install a 1/2" dedicated COLD water line with shut-off valve and a 3/8" compression fitting ② within 3 feet (90cm) of the machine, and a pressure reducer to a maximum of 3-4 bars (available @ Zuccarini).

- SHUT-OFF ② MUST ALWAYS BE EASILY ACCESSIBLE IN CASE OF AN EMERGENCY!

- If you choose our BWT in-line water softening system, the shut-off valve is normally installed below your counter ③ leaving space for (and access to) the filter assembly.

- *If using an in-home REVERSE OSMOSIS (RO) or similar system, YOU MUST MAINTAIN 3 to 4 BARS OF PRESSURE to the machine. Also, you may choose to install the water-line above OR below the counter. NB The machine comes with a

3 ft (90cm) flexible hose fitted with a 3/8" European fitting, but we can provide a longer hose AND/OR a fitting to match it to your North American 3/8" compression fitting (extra charges may apply).

- SPECS: Water flow rate: 1GPM / TDS: 50-250ppm / Alkalinity: 10-150ppm / Chlorine: <0.50ppm / PH: 6.5-8.5 / Filtration: <1.0 micron

DRAINAGE (if you prefer not having to remove the drip tray when it fills up)


- A minimum 1" (2.5cm) diameter under-counter open drain within 3 ft (90cm) of the machine ④.
- NOTE: Drain hose (included) must always run DOWNWARDS (never bending upwards).

COUNTER REQUIREMENTS (if you're installing a BWT and/or DRAINAGE)

- Minimum 2.5" (7cm) hole in the counter under the machine for cold water, (drain hose & power supply):
 - The hole should be near the centre of the spot where the machine will be sitting.
 - IF ZUCCARINI IS INSTALLING YOUR MACHINE and your COUNTER-TOP IS MADE OF STONE, METAL, or >2" THICK WOOD, THE HOLE MUST BE DRILLED BEFORE OUR INSTALLER ARRIVES
- Leave vertical OR horizontal space under the counter near the cold water shut-off ② for the BWT Water Softener ③ (approx. 20"x5"x5" / 51x13x13cm) which must remain accessible for annual replacement.
- Suggested counter height is 36" to 40" (1 metre); suggested vertical space above counter is min. 19".

COUNTER SPACE REQUIREMENTS

Width: 14.5" (37cm) Depth: 17.25" (44cm)
Height: 16.25" (41cm) Weight: 65lb (30 kg)

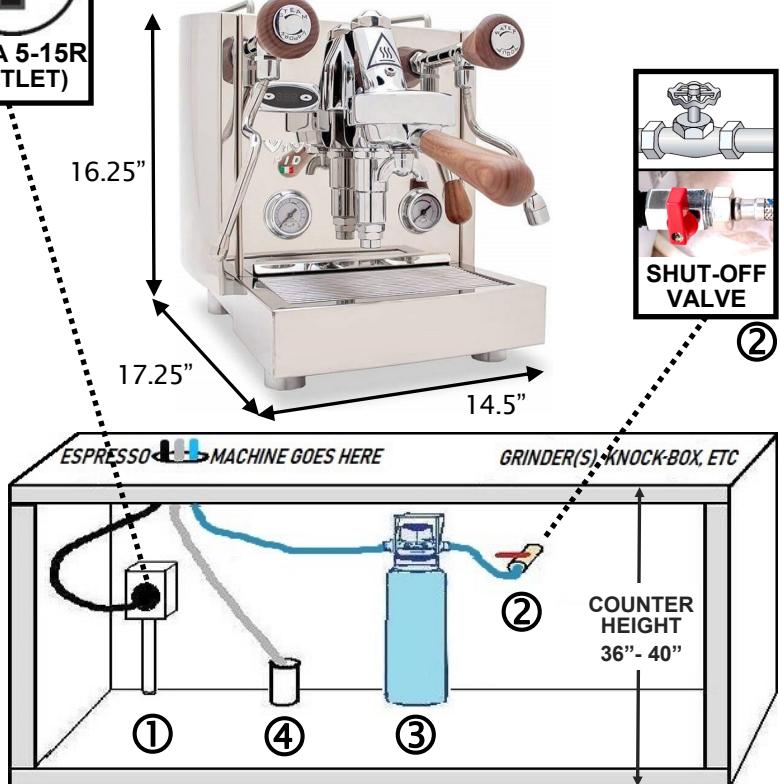

IZZO® **ALEX**  MADE IN ITALY

FAILURE TO HAVE SITE PREPARED AT TIME OF INSTALLATION APPOINTMENT
WILL CAUSE DELAYS & RESULT IN ADDITIONAL SERVICE & TRAVEL CHARGES.



ESPRESSO
MACHINES

NO. 1335 DAVENPORT ROAD
TORONTO, ONTARIO M6H 2H4

416 - 537 - 3439

service@zuccarini.ca
ZUCCARINI.CA